


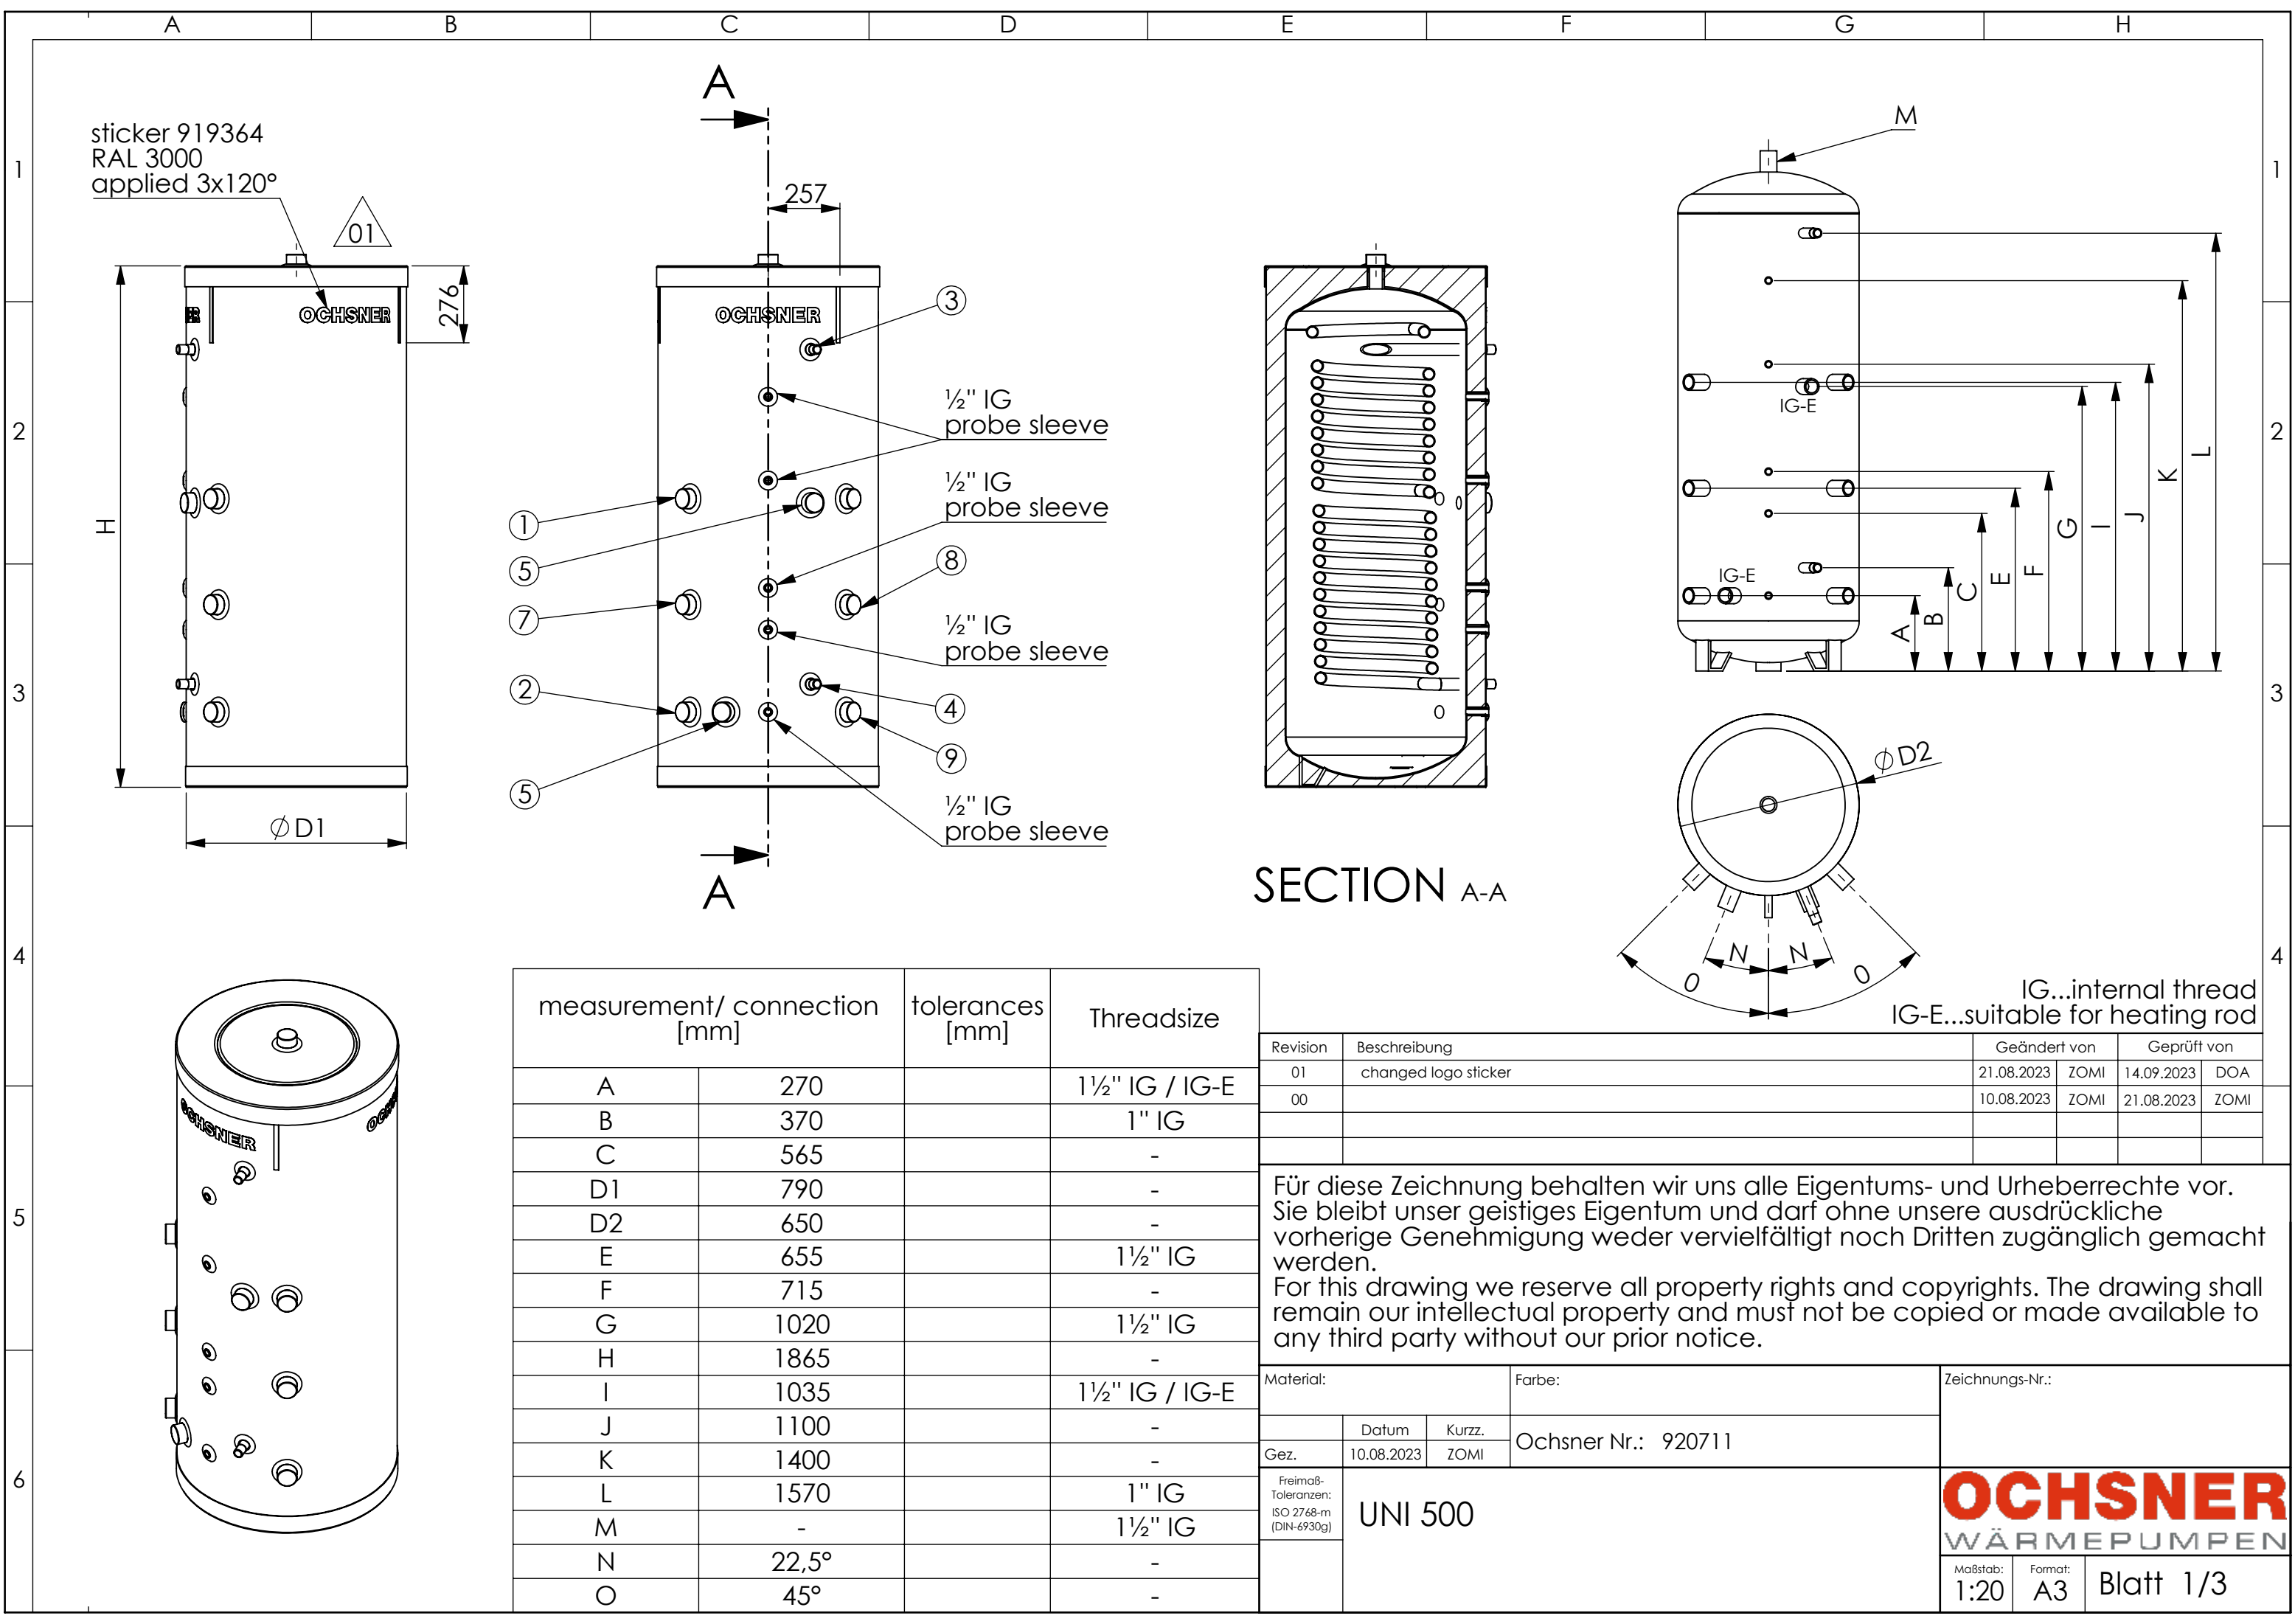


measurement/ connection [mm]		tolerances [mm]	Threadsize
A	270		1½" IG / IG-E
B	370		1" IG
C	565		-
D1	790		-
D2	650		-
E	655		1½" IG
F	715		-
G	1020		1½" IG
H	1865		-
I	1035		1½" IG / IG-E
J	1100		-
K	1400		-
L	1570		1" IG
M	-		1½" IG
N	22,5°		-
O	45°		-

Revision	Beschreibung	Geändert von		Geprüft von	
01	changed logo sticker	21.08.2023	ZOMI	14.09.2023	DOA
00		10.08.2023	ZOMI	21.08.2023	ZOMI

Für diese Zeichnung behalten wir uns alle Eigentums- und Urheberrechte vor. Sie bleibt unser geistiges Eigentum und darf ohne unsere ausdrückliche vorherige Genehmigung weder vervielfältigt noch Dritten zugänglich gemacht werden.

For this drawing we reserve all property rights and copyrights. The drawing shall remain our intellectual property and must not be copied or made available to any third party without our prior notice.

Material:			Farbe:		Zeichnungs-Nr.:
	Datum	Kurzz.	Ochsner Nr.: 920711		
Gez.	10.08.2023	ZOMI			
Freimaß-Toleranzen: ISO 2768-m (DIN-6930g)		UNI 500			OCHSNER WÄRMEPUMPEN
		Maßstab:	Format:	Blatt 1/3	
		1:20	A3		

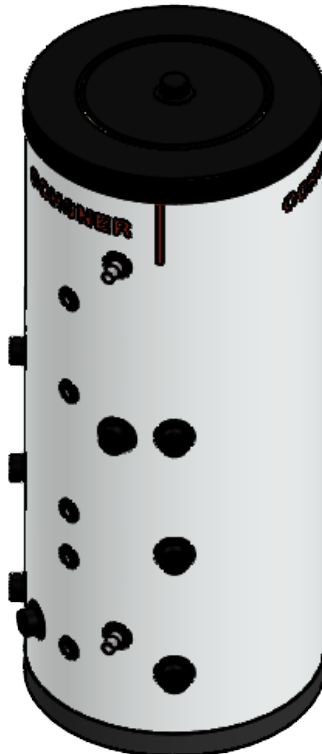A		B		C		D		E		F		G		H	
1	Target OCHSNER														
	energy efficiency class (F bis A+)				B										
	height H with insulation [mm]				1865										
2	outer diameter D1 with insulation [mm]				790										
	outer diameter D2 without insulation [mm]				650										
	weight [kg]				460										
	nominal capacity [l]				544										
3	electric immersion heater usable up to max. [kW]				9										
	fresh water coil type				Corrugated stainless steel pipe										
	fresh water coil volume [l]				28										
	fresh water coil surface area [m²]				5,45										
4	tilt height with insulation [mm]				2025										
	tilt height without insulation [mm]				-										
	tank material				Steel (not coated)										
	tank insulation thickness [mm]				75										
5	type of tank insulation				Polyurethane (not detachable)										
	standby heat loss [W]				77										
	number of sleeves for electric immersion heater				2										
	max. permissible operating pressure [bar]				3										
6	coating color				RAL9010, RAL9016 or similar										
	max. operating performance for heat pump, only warm water [kW]				23										
	max. operating performance for heat pump, as combined puffer tank [kW]				11										
	additional parts				the insulating caps should be included in the scope of delivery										

Revision	Beschreibung				Geändert von		Geprüft von	
01	changed logo sticker				21.08.2023	ZOMI	14.09.2023	DOA
00					10.08.2023	ZOMI	21.08.2023	ZOMI

Für diese Zeichnung behalten wir uns alle Eigentums- und Urheberrechte vor. Sie bleibt unser geistiges Eigentum und darf ohne unsere ausdrückliche vorherige Genehmigung weder vervielfältigt noch Dritten zugänglich gemacht werden.
For this drawing we reserve all property rights and copyrights. The drawing shall remain our intellectual property and must not be copied or made available to any third party without our prior notice.

Material:			Farbe:			Zeichnungs-Nr.:		
	Datum	Kurzz.	Ochsner Nr.: 920711					
Gez.	10.08.2023	ZOMI						

Freimaß-Toleranzen: ISO 2768-m (DIN-6930g)	UNI 500	OCHSNER WÄRMEPUMPEN		

Maßstab:	Format:	Blatt 2/3
1:20	A3	

<